HERMES - HERMETIC OUTDOOR SOCKET



Cable or microduct entries of 7 and 12 mm ✓

Dedicated space for gas-tight connector ✓

Protection rating IP54 ✓


FEATURES

- IP54 and IK10 protection class
- Maximum capacity: 4SC simplex adapters, 12 splices
- Dedicated space for a gas-tight connector for a 7 mm duct
- Entry points for two cables or microducts: 7 mm and 12 mm
- Capability to exit with 4 Ez-Bend cables along the wall or directly into the dwelling through wall penetration
- Compact, lightweight, yet exceptionally sturdy casing
- Ideal for residential installations, including single-family homes and low-rise multi-family buildings (duplexes, townhouses)
- UV-resistant material: RAL 7035 Polycarbonate
- Includes a set of mounting screws and anchors

Additional Equipment:
adapters, sticker, seal, silk-screen printing/logo

APPLICATION

Microduct 7/3,5 mm with gas connector
MIcroduct 12/8
Outdoor cable

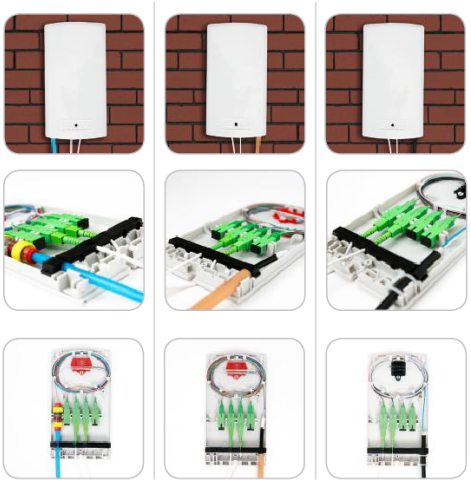

PARAMETERS

Parameters	Specification
Dimensions (width/height/depth) [mm]:	120/ 220/28
Material:	Polycarbonate
Number of Adapters:	4 SC or 8 LC (4 LC DX)
Number of Splices:	12
Protection Class:	IP54
Color:	Grey (RAL 7035)
Weight [kg]:	0,25
Installation Temperature [°C]:	- 10 + 50
Operating Temperature [°C]:	- 40 + 70
Transport and Storage Temperature [°C]:	- 40 + 70

Copyright 2023 Cellco